


# Calibration Exciter VE-10

The VE-10 is a handy calibration exciter for a vibration meter and a vibration pickup (piezoelectric accelerometer).

- Calibrations of acceleration, velocity and displacement measurement equipment.
- 600 times of operation possible with single battery in auto-stop mode. Manual mode provided.
- Automatic power-off function for overload (more than 100 g).

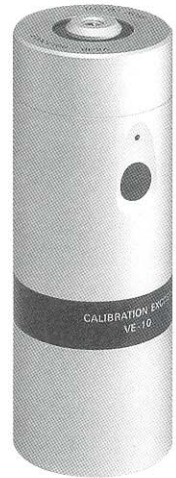

Calibration of Vibration Meter VM-61 by VE-10

## Specifications

Oscillator :	Sinusoidal wave oscillator
Frequency :	159.2 Hz $\pm 1\%$ for $-10$ to $+55\text{ }^\circ\text{C}$
Acceleration :	10m/s <sup>2</sup> (RMS) $\pm 3\%$ for 10 to 40 $^\circ\text{C}$ $\pm 5\%$ for $-10$ to $+55\text{ }^\circ\text{C}$
Velocity :	10mm/s (RMS) $\pm 4\%$ for 10 to 40 $^\circ\text{C}$ $\pm 6\%$ for $-10$ to $+55\text{ }^\circ\text{C}$
Displacement :	10 $\mu\text{m}$ (RMS) $\pm 5\%$ for 10 to 40 $^\circ\text{C}$ $\pm 7\%$ for $-10$ to $+55\text{ }^\circ\text{C}$
Maximum Load :	70 g
Transverse Amplitude :	Less than 5 % of main axis amplitude
Total Harmonic Distortion :	Less than 3 % for 20 to 60 g load Less than 5 % for 10 to 70 g load
Operation Mode :	Auto-stop mode (approx. one minute operation), Manual mode
Operating Conditions :	Temperature; $-10$ to $+55\text{ }^\circ\text{C}$ Humidity; 0 to 90 % RH
Power :	IEC 6LR61 (9 V) battery $\times 1$
Battery Life :	More than 600 operations for auto-stop mode More than 10 hours for continuous operation
Dimensions and Weight :	51 mm dia. $\times$ 134 mm, approx, 600 g (battery included)
Standard Accessories :	Mounting adapter $\times 1$ , M6 screw $\times 1$ , M6-UNF screw $\times 1$ , Leather case $\times 1$ , 6LR61 alkaline battery $\times 1$

Specifications subject to change without notice.



**RION CO., LTD.**

20-41, Higashimotomachi 3-chome, Kokubunji, Tokyo 185-8533, Japan  
Telephone: +81-42-359-7888 Fax: +81-42-359-7442  
URL : <http://www.rion.co.jp/>

UK DISTRIBUTOR APPOINTED BY



BEAUFORT COURT  
17 ROEBUCK WAY  
MILTON KEYNES  
MK5 8HL

☎ 01908 642846  
☎ 01908 642814  
✉ [info@noise-and-vibration.co.uk](mailto:info@noise-and-vibration.co.uk)  
🌐 [www.noise-and-vibration.co.uk](http://www.noise-and-vibration.co.uk)