





# RIONOTE

The groundbreaking multi function measuring system from RION
Compact design, easy and intuitive operation
Wireless connections
Use it anytime anywhere!



### **Analysis result display examples**

#### FFT analysis

RIONOTE enables you to perform FFT analysis on multiple channels simultaneously. The results are shown in clear graphs on the large color screen, in real time, or from stored data when using the recall function. A marker allows you to scroll through the data, and enables the readout of the level of a frequency of interest.



#### **Transfer function**

The transfer function represents the relation between an input signal and output signal in the frequency domain, allowing the determination of amplitude and phase. In this mathematical calculation category, the RIONOTE supports coherence function and cross spectrum processing.



#### **Waveform recording**

By using the waveform recording program, it is possible to display and record the time waveform of the incoming signal(s). Available recording time depends on the number of input channels and the selected frequency range. The figure below shows a time waveform displayed on the screen of the Main Control Unit.



#### Waveform post processing

After completing waveform recording (as explained above), the stored waveforms can be displayed on the Main Control Unit's large screen, and played back by using the earphone jack output. Moreover, various secondary post processing functions for the waveform data are available in the Main Control Unit, including FFT analysis as shown in the screen example below.



**RIONOTE** is combining the newest quality, ease of use and economical sense which can be configured to up to 16 channanywhere wireless. The Main Control Unit is program of your choice. All on a large colo both programs and hardware for this mea




## **RIONOTE**

#### Main Control Unit and Amplifier

Supports direct connection of microphones and piezoelectric accelerometers.



## underside of the Main Control Unit

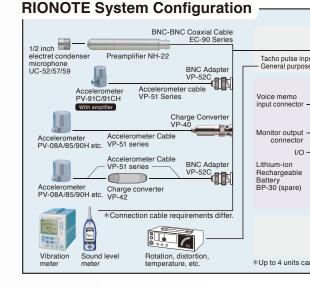

technology with the traditional virtues of RION;
RIONOTE consists of a Main Control Unit SA-A1
nels and allowing you to perform measurements
s easy and intuitive to operate, with the dedicated
or touch screen. RION will continuously develop
assuring system of the future.




RIONOTE also enables the use of a wireless dock or wireless sensor amplifiers to avoid the cost and hassle of cables. A plurality of wireless docks and wireless sensor amplifiers can be used simultaneously, up to 16 channels, to store the measured data in the Main Control Unit as well as in the memory of wireless dock or wireless sensor amplifiers.



#### **Wireless Dock (and Amplifier)**

Separate type wireless dock and amplifier (2 channel or 4 channel configuration)

\*Selling of Wireless dock (SA-A1WD) differs from each country. Please contact us for further questions.

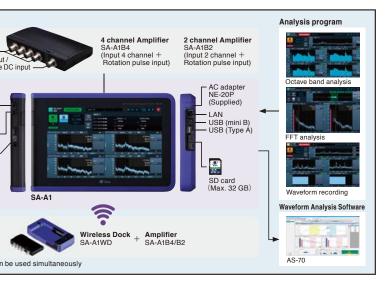

#### Octave band analysis

Real time analysis of noise or vibration levels for evaluation and designing countermeasures is usually performed by means of octave band analysis (using either octave bands or 1/3 octave bands). The below screen sample of the RIONOTE displays octave analysis results in 4 channels as a graph and numeric values at the same time.




#### **RIONOTE** intuitive user interface

Lets the user select the required program for the respective purpose: SX-A1FT (FFT analysis), SX-A1RT (octave band analysis), or SX-A1WR (waveform recording). The right side of the screen provides access to various settings.



#### **RIONOTE** calibration screen

Serves for calibration of microphones or accelerometers connected to the SA-A1.

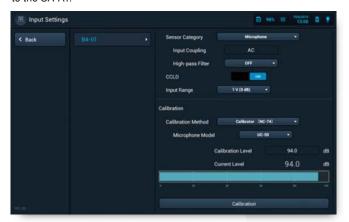

#### ■ Ordering Information

Ordering information			
Product name	Product number		
RIONOTE 2 channel FFT Analyzer	SA-A1FTB2		
RIONOTE 4 channel FFT Analyzer	SA-A1FTB4		
RIONOTE 2 channel Octave Analyzer	SA-A1RTB2		
RIONOTE 4 channel Octave Analyzer	SA-A1RTB4		
RIONOTE 2 channel Frequency Analyzer (FFT and Octave)	SA-A1FTRTB2		
RIONOTE 4 channel Frequency Analyzer (FFT and Octave)	SA-A1FTRTB4		
RIONOTE Program for FFT Analysis	SX-A1FT		
RIONOTE Program for 1/3 Octave Analysis	SX-A1RT		

#### **Options**

Product number
SA-A1WD
BP-30
MC-32SD3
MC-20SD2
BSHSM03BK
ATH-C320-BK
VA-12015
_
-

#### ■ Specifications

RIONOTE Main Control Unit SA-A1 RIONOTE 4 channel / 2 channel Amplifier SA-A1R4/R2

	ONOTE Main Contr put section	ol Unit SA-A1, RIONOTE 4 channel / 2 channel Amplifier SA-A1B4/B	
	Number of channels	4 (2), BNC connectors	
		±13 V	
	Max. input voltage		
۸.	CCLD	2 mA 24 V (4 mA Factory option)	
Amplifier section		DO 4- 00 Id Is 0 05 II- 4- 00 Id Is	
	Frequency Range	DC to 20 kHz or 0.25 Hz to 20 kHz	
	Input range	-40 dB to 20 dB, 20-dB steps, 0 dB ref. Vrms = 1 V	
	Residual noise	At range full-scale: -85 dB or less (0 dB range, AP level)	
	Dynamic range	100 dB or better (0 dB range, fs = 51.2 kHz, 400 line FFT noise level)	
	Phase difference between channels	±1 deg. or less (1 Hz to 20 kHz, same input range)	
A	D converter section		
	A/D converter	24 bit, delta-sigma type, simultaneous sampling	
	Sampling frequencies	51.2 kHz, 25.6 kHz, 12.8 kHz, 5.12 kHz, 2.56 kHz,1.28 kHz, 512 Hz, 256 Hz	
Display		10.1 inch TFT color LCD, 1 280 x 800 pixels, transmissive type	
	Touch panel	Multi-touch (2 points), projected capacitive type	
Input/output section			
	USB	USB A x 1, mini B x 1	
	Earphone jack	Yes Stereo mini jack, $\phi$ 3.5	
	SD card slot	Yes (SDHC support, max. 32 GB)	
Ta	acho pulse input		
	Common		
	Number of channels	1, BNC connector	
	Input voltage range	0 to 12 V	
	Tacho		
	Measurement rotation speed range	5 000 pulse/s	
	General purpose		
	A/D converter	10 bit successive approximation type	
	Sampling frequency	Approx. 10 Hz	
E:	xternal trigger	Open collector supported, internal pull-up 3.3 V	
Power supply		Li-Ion battery (battery life approx. 4 hours, depending on usage conditions), AC adapte	
Dimensions, Weight		40 (H) x 275 (W) x 188 (D) mm	
		SA-A1: 1 200 g (incl. 280 g battery, SA-A1B4 mounted)	
Water-resistant rating		Equivalent to IPX4	
_	perating temperature range	-10 °C to +50 °C using AC adapter, max. 90 % RH (no condensation)	
_	upplied accessories	Rechargeable Li-Ion battery, BP-30 x 1, AC adapter NE-20P x 1	
-	,,	1 5	

#### RIONOTE Wireless Dock, SA-A1WD (and Amplifier SA-A1B4/B2)

THOMOTE WHO GOOD BOOK, GYCYCLAND (and Yampamer GYCYCLD 1182)		
Input		4 or 2 channels (Amplifier SA-A1B4/B2 needed)
Signal transfer to	LAN port	Ethernet 100 base-TX
main platform	Wireless	WLAN (IEEE802.11a/b/g/n, 2.4/5 GHz)
Distance of wireless transfer		about 50 m*
Memory		SD card (SDHC support, max 32 GB)
Power supply		8 IEC R6 (sizeAA) batteries(alkaline or nickel-hydride), AC adapter
Dimensions, Weight		Approx. 42 (H) × 193 (W) × 95 (D) mm, Approx. 500 g (incl. battery)
Water-resistant rating		IP grade IPX4 equivalent (same as main unit)

<sup>\*</sup> Depending on usage conditions

#### SX-A1FT, RIONOTE Program for FFT Analysis

trum,

#### SX-A1RT, RIONOTE Program for 1/3 Octave Analysis

_	,	2 Trogram for 170 Cotavo 7 maryolo
Standard compliance		JIS C1513 Class 1, JIS C1514 Class1,
		IEC 61260:1995 Class1, ANSI S1.11-2004 Class1
Band filter center frequencies and number of bands		cies and number of bands
Octave	bands	0.5 to 16 000 Hz, 16 bands Max. 4 channels
1/3 oct	ave bands	0.4 to 20 000 Hz, 48 bands Max. 3 channels
Instantaneous value data		Time weighted level $L_p$ , Time averaged level $L_{eq}$ , Time weighted
(every 100 ms)		maximum level Lmax
Processing value data		Time averaged level $L_{eq}$ , Sound exposure level $L_E$ ,
		Time weighted maximum level Lmax, Time weighted minimum level Lmin,
		Time percentile level $L_N$ (5, 10, 50, 90, 95, 33.3), max. 5 values
Store function		Auto/Manual
Time weighting		F (Fast) 125 ms, 630 ms, S (Slow) 1 s, 10 s
characteristics		
Frequency weighting		A, C, Z
characteristics		
Trigger	Trigger modes	Free, Single, Repeat
	Trigger source	AP level, Band level, External signal, Time

#### SX-A1WR, RIONOTE Program for Waveform recording (Installed in SA-A1 main unit)

Number o	f recording	1 to 4 channels + rotation or General purpose DC
channels		
Frequency range		20 kHz, 10 kHz, 5 kHz, 1 kHz, 500 Hz, 100 Hz
Quantization		16 bit/24 bit
Trigger	Trigger modes	Free, Single, Repeat
	Trigger source	Waveform, Time, External, Rotation speed
Voice memo marker function		Yes
Monitor output (playback)		Allows listening to recorded data (51.2 kHz, 25.6 kHz, 12.8 kHz only)
Recorded data		WAVE format

Precautions regarding waterproofing
Before use, verify that the connector cover on the side of the unit is firmly closed.
To maintain the water-resistant rating, the internal packing of the enclosure must be replaced every two years (at cost).



RION Co., Ltd. is recognized by the JCSS which uses ISO/IEC 17025 (JIS Q 17025) as an accreditation standard and bases its accreditation scheme on ISO/IEC 17011. JCSS is operated by the accreditation body (IA Japan) which is a signatory to the Asia Pacific Laboratory Accreditation Cooperation (APLAC) as well as the International Laboratory Accreditation Cooperation (ILAC). The Quality & Environmental Management system Center of RION Co., Ltd. is an international MRA compliant JCSS operator with the accreditation number JCSS 0197.

ISO 14001 RION CO., LTD. ISO 9001 RION CO., LTD.

\* Windows is a trademark of Microsoft Corporation. \* Specifications subject to change without notice

Distributed by:



3-20-41, Higashimotomachi, Kokubunji, Tokyo 185-8533, Japan Tel: +81-42-359-7888 Fax: +81-42-359-7442



This product is environment-friendly. It does not include toxic chemicals on our policy.

This product is certified to an International Protection rating of IP54 (dust protected and resistant to splashing water). This leaflet is printed with environmentally friendly UV ink.